



HeusTractors

Stougjesdijk 153 3271 KB

Mijnsheerenland NL

info@heustractors.com

+31 (0) 186 61 2333

XCMG XE27E

Fitted as standard with:



- Kubota Stage-V diesel engine (18.2 kW)
- Proportional hydraulic system with 2 auxiliary functions (pressure & flow adjustable)
- Demolition/sorting function with quick coupler and two AUX lines
- Rubber tracks (300 mm wide)
- Swivelling boom: 72° left / 55° right
- Dozer blade with float function
- Safety cabin with ROPS/TOPS/OPG certification
- Heating and air conditioning
- Boom 2090 mm and arm 1300 mm
- Counterweight 310 kg

€32,280.00

Specifications

DIMENSIONS

Boom length	2090
Minimum unloading height	3210

ENGINE

Cooling	Liquid
Power in kW	18.2
Rated speed	2400

HYDRAULIC SYSTEM

Driving system pressure	210
Main pressure safety valve	243
Main pump output	82.8
Steering pressure	35
Swing system pressure	243
Type of main pump	1 variable pump

**HYDRAULIC SYSTEM
OTHER**

Diesel tank	38
Hydro tank	22


TECHNICAL SPECIFICATIONS

Arm digging force	23
Gradeability	58
Ground pressure	30
Max traction force	29.7
Max. Digging force	26
Rotation speed	10

WEIGHT

Own weight	2780
------------	------

Technical drawing

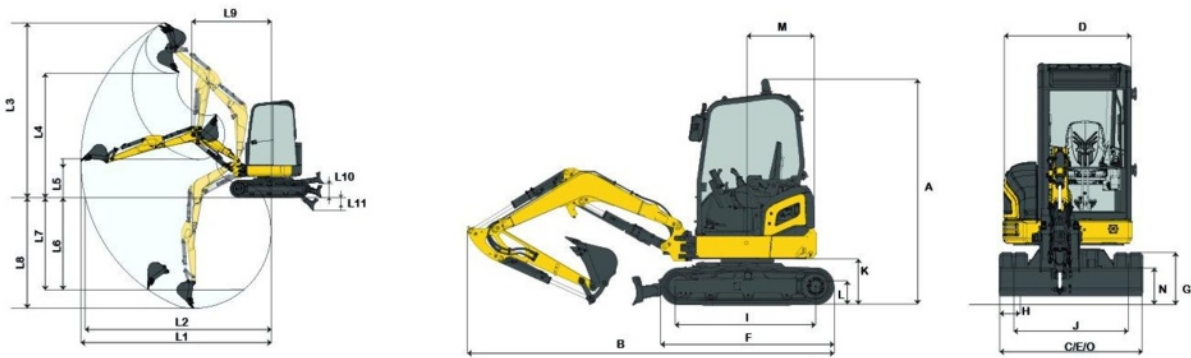

(A) Height to top of roof	2620
(B) Overall length with bin	4225
(C) Overall width	1500
(D) Width of upper structure	1350
(E) Chassis width	1500
(F) Track length	1980
(G) Height of tracks	452
(H) Width of tracks	300
(I) Cradle base	1560
(J) Track width	1200
(K) Counterweight free space	528
(L) Ground clearance	290
(L1) Max. excavation radius	4750
(L10) Maximum lifting height of dozer blade	1980
(L11) Max cutting depth of dozer blade	330
(L2) Maximum reach at GRP	4640
(L3) Max. Digging height	4390
(L4) Max. Tipping height	3210
(L6) 8 ft digging depth with flat floor	2312
(L7) Max. Vertical digging depth	2310
(L8) Max. Digging depth	2800
(L9) Min. forcing radius	2800
(M) Tail swing radius	790
(N) Height of dozer blade	300 mm

Pictures







