HeusTractors
Stougjesdijk 153 3271 KB
Mijnsheerenland NL
info@heustractors.com
+31 (0) 186 61 2333



XCMG XE27CREV

Fitted as standard with:

- 16.1 kW permanent magnet synchronous electric motor
- 23.5 kWh lithium-iron phosphate battery pack
- Load-sensing hydraulic system with variable pump
- Compact design with short swing radius and dozer blade
- ROPS safety cab in accordance with ISO 12117-2
- LED work lights and ergonomic control panel
- Rubber tracks (300 mm wide) with hydraulic travel motor
- 0.06 m³ ground bucket and standard 2,090 mm boom
- 2 working modes (Power & Eco) for optimum efficiency
- Naturally cooled battery system with heating element

€0.00

Specifications

DIMENSIONS

8 ft digging depth with flat floor	2313
Chassis width	1500
Counterweight free space	528
Cradle base	1560
Ground clearance	290
Height of dozer blade	300 mm
Height of tracks	455
Height to top of roof	2620
Max cutting depth of dozer blade	330
Max. Digging depth	2800
Max. Digging height	4390
Max. Tipping height	3120
Max. Vertical digging depth	2310
Max. excavation radius	4750
Maximum lifting height of dozer blade	310
Maximum reach at GRP	4640
Min. forcing radius	1980
Minimum unloading height	955
Overall length with bin	4225
Overall width	1500
Tail swing radius	790
Track length	1560
Track width	1200
Width of tracks	300
Width of upper structure	1350

ELECTRIC MOTOR

Battery capacity	33
Driving motor	16.1
Running time	5 hours

HYDRAULIC SYSTEM

Driving system pressure	243
Main pressure safety valve	240
Main pump output	86.4
Steering pressure	24.3
Swing system pressure	21

OTHER

Hydro tank	20

TECHNICAL SPECIFICATIONS

Arm digging force	14
Ground pressure	26.4
Max traction force	29.7
Max. Digging force	23
Rotation speed	10

WEIGHT

Own weight	2750

Pictures






XCMG
XE27CR


XCMG


XCMG
XE27CR


XE27CR

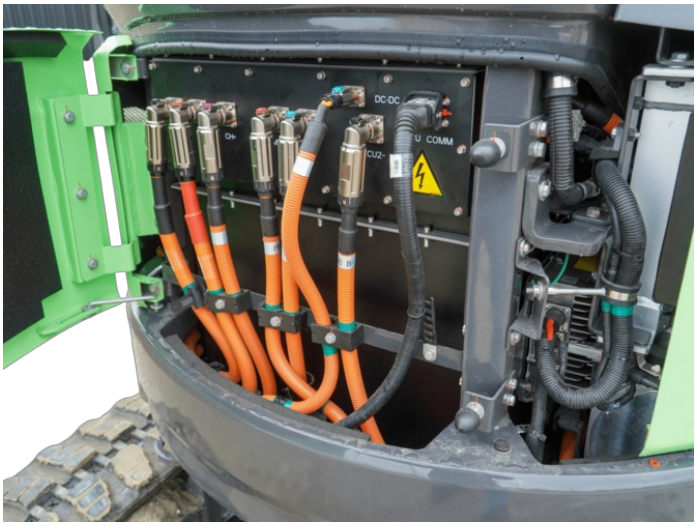

R EV


ZERO
EMISSION




XCMG




DC-DC
U COMM


XE27CR