HeusTractors
Stougjesdijk 153 3271 KB
Mijnsheerenland NL
info@heustractors.com
+31 (0) 186 61 2333



XCMG XE35E

Fitted as standard with:

- Kubota Stage-V
- Hammer function
- proportional demolition/sorting function
- Air conditioning
- Rubber tracks
- Dozer blade

€38,580.00

Specifications

DIMENSIONS	
Cabin width	1740
Counterweight free space	587
Cradle base	2200
Ground clearance	297
Height of tracks	550
Height to top of roof	2535
Max. Digging depth	3060
Max. Digging height	5000
Max. Tipping height	3600
Max. Vertical digging depth	2260
Max. excavation radius	5300
Min. forcing radius	2170
Overall length with bin	4960
Overall width	1740
Platform width	1480
Width of tracks	300

ENGINE

Cooling	Liquid
Rated speed	2200

HYDRAULIC SYSTEM

Driving system pressure	275
Main pressure safety valve	230
Main pump output	108
Steering pressure	39
Swing system pressure	167

OTHER

Diesel tank	40
Engine oil capacity	7
Hydro tank	45

TECHNICAL SPECIFICATIONS

Arm digging force	20.3
Ground pressure	36.6
Max traction force	31.6
Max. Digging force	28.6
Rotation speed	9

WEIGHT

Own weight	4200

Pictures






XE35E

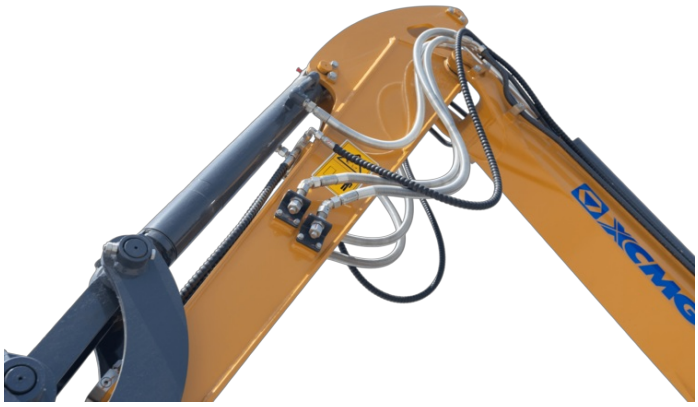









XE35


XCMG