HeusTractors
Stougjesdijk 153 3271 KB
Mijnsheerenland NL
info@heustractors.com
+31 (0) 186 61 2333



EUROTRAC W12 S

The Eurotrac W12-S for agricultural and industrial use

Fitted as standard with:

- Additional hydraulic function on the joystick
- Hydraulic quick-change coupler
- Hydrostatic transmission with 2 travel speeds
- Suspension seat
- Heavy-duty axles
- LED lighting / Light bar
- Wide tyres 31×15.5-15

€26,800.00

Specifications

ELECTRICAL INFORMATION

Electric system	12 V

ENGINE

Cooling	Liquid
Engine power	26

HYDRAULIC SYSTEM


Oil yield	46
Workload	180 bar


OTHER

Diesel tank	45
Hydro tank	40

WEIGHT	
Lifting frame horizontal & machine straight	1200
Lifting frame horizontal & machine tilted	840 kg
Max. Lifting capacity	1350
Own weight	2150

Technical drawing

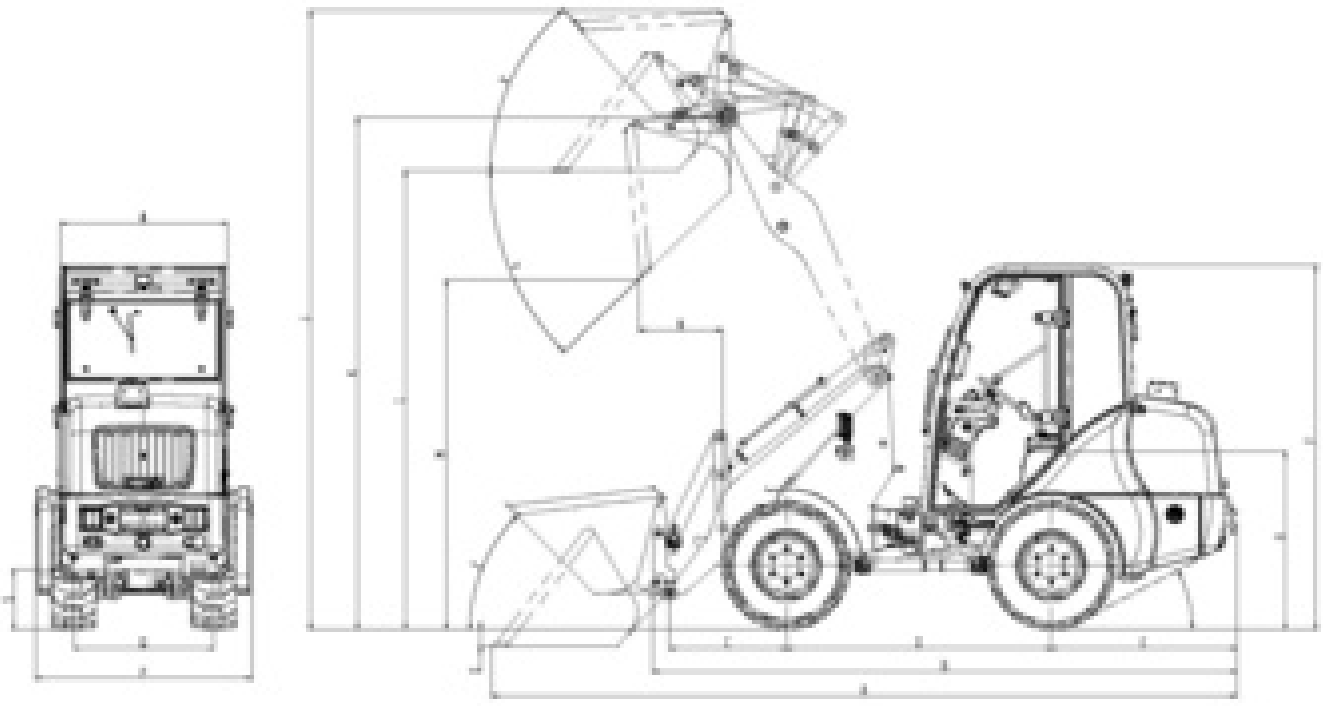

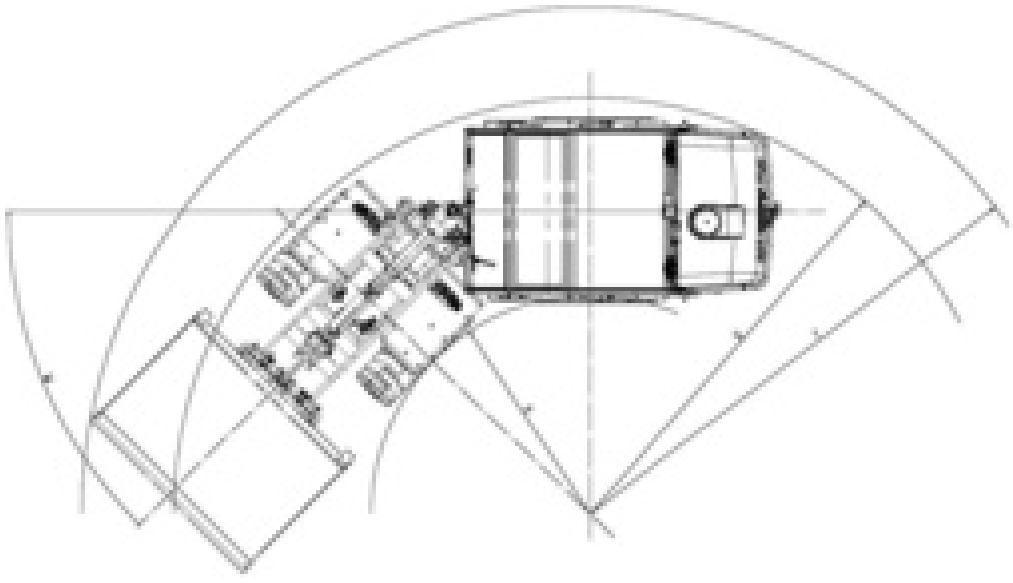

(A) Overall length with bin	4360
(B) Overall length without bin	3440
(C) Bin pivot	704
(D) Cradle base	1600
(E) Rear overhang	1094
(F) Height to top of roof	2225
(H) Seat height	1205
(J) Total working height	3728
(K) Max. lifting height	2900
(L) Loading height	2810
(M) Ejection height	2250
(N) Range (m)	517
(O) Digging depth	65
(P) Overall width	1340
(Q) Track width	980
(S) Ground clearance	230
(T) Outer diameter	2597
(U) Turning circle	3085
(V) Inside turning circle	1419
(W) Rotation angle	45
(X) Tilting angle at max. lifting height	45
(Y) Tipping angle	45
(Z) Tilt-in angle	46

Pictures














Eurotrac












1/2
0
32
80
110
40
Eurotrac





