



HeusTractors

Stougjesdijk 153 3271 KB

Mijnsheerenland NL

info@heustractors.com

+31 (0) 186 61 2333

EUROTRAC TH25.6

The Eurotrac TH25.6 for agricultural and industrial use

Fitted as standard with:

- Kubota StageV engine
- 4x4 drive and 4-wheel steering
- Extra hydraulic function on joystick
- Quick-change hydraulics
- Hydrostatic with 2 travel speeds
- Radio / Fan / Camera
- Heavy duty axles
- Light bar / LED lights
- Wide tyres 12x16.5 NHS



€52,250.00

Specifications

ELECTRICAL INFORMATION

Battery capacity	110
------------------	-----

ENGINE

Cooling	Liquid
---------	--------

Engine power	70
--------------	----

HYDRAULIC SYSTEM

Oil yield	79.3
-----------	------

Workload	235 bar
----------	---------

OTHER




Diesel tank	60
-------------	----

Hydro tank	75
------------	----

WEIGHT

Max. Lifting capacity	2500
Own weight	4810

Technical drawing

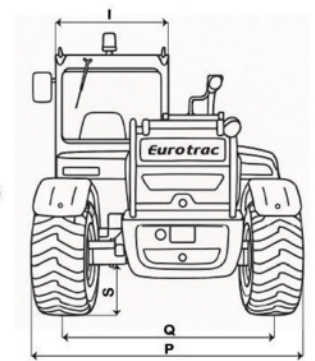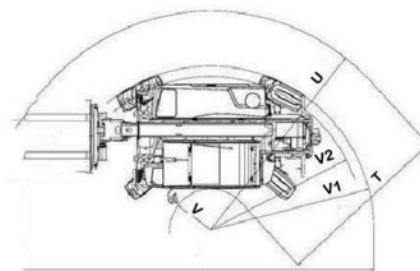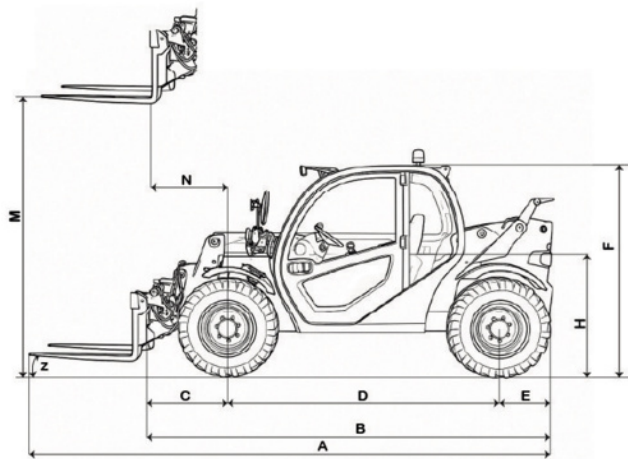

(A) Overall length with bin	5090
(B) Overall length without bin	3882
(C) Bin pivot	892
(D) Cradle base	2300
(E) Rear overhang	603
(F) Height to top of roof	1945
(H) Seat height	950
(M) Max. lifting height	5860
(M1) Ejection height	5220
(M2) Total working height	6550
(M3) Loading height	5750
(N) Range (m)	1660
(P) Overall width	1828
(Q) Track width	1494
(S) Ground clearance	330
(T) Outer diameter	3700
(U) Turning circle	4500
(V) Inside turning circle	800
(V1) Minimum turning radius at the outer edge of the outer tyre	3180
(V2) Minimum turning circle in the centre of the outer tyre	3000

Pictures









