HeusTractors
Stougjesdijk 153 3271 KB
Mijnsheerenland NL
info@heustractors.com
+31 (0) 186 61 2333

EUROTRAC W12 CMS



The Eurotrac W12-CMS for agricultural and industrial use

Fitted as standard with:

- Kubota Stage V engine
- Additional hydraulic function on joystick
- Hydraulic quick-change coupler
- Hydrostatic transmission with 2 travel speeds
- Floating position control
- Suspension seat
- Heavy-duty axles
- Reversing camera
- Wide tyres 31×15.5-15

€29,300.00

Specifications

ELECTRICAL INFORMATION

Electric system	12 V

ENGINE

Cooling	Liquid
Engine power	26

HYDRAULIC SYSTEM


Oil yield	46
Workload	177 bar


OTHER

Diesel tank	45
Hydro tank	40

WEIGHT	
Lifting frame horizontal & machine straight	1300
Lifting frame horizontal & machine tilted	840 kg
Max. Lifting capacity	1350
Own weight	2280

Technical drawing

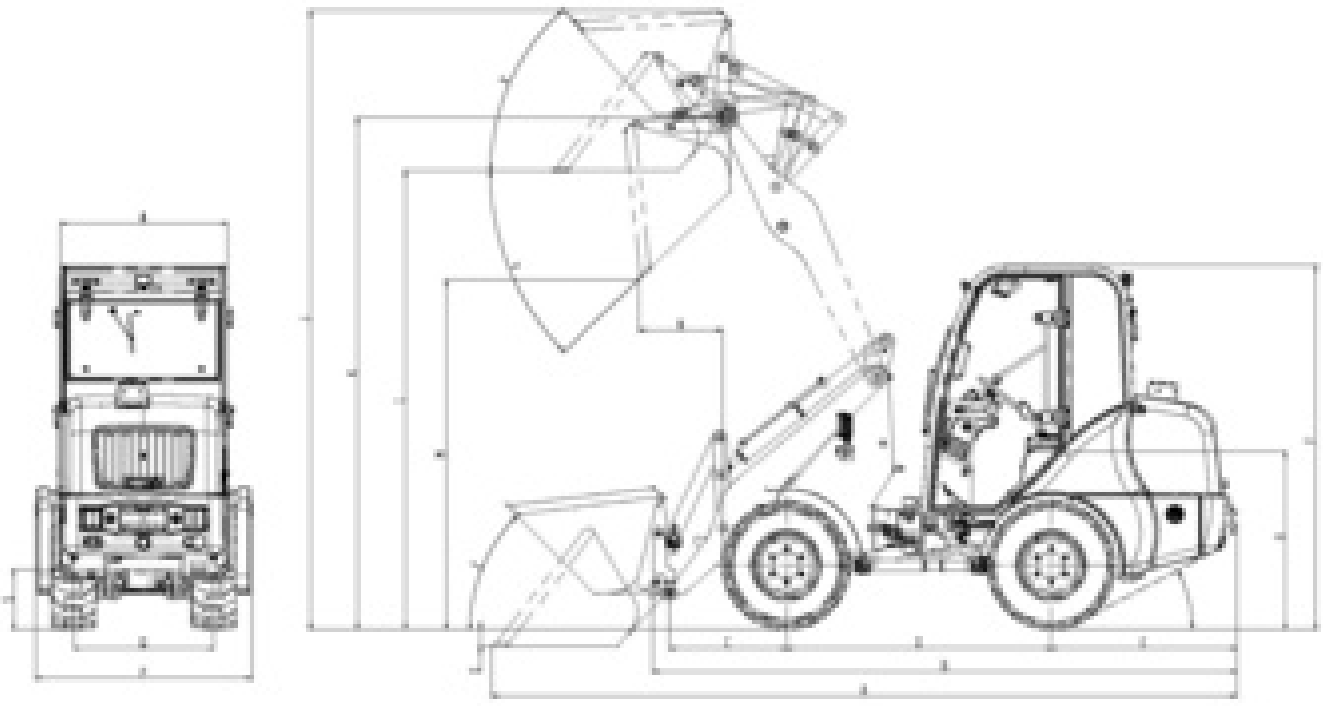

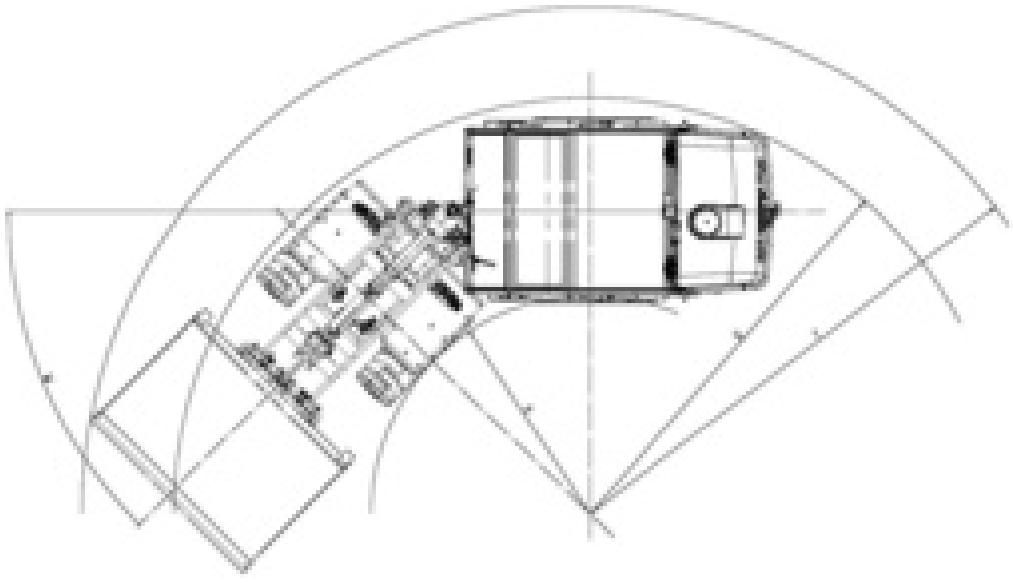

(A) Overall length with bin	4360
(B) Overall length without bin	3440
(C) Bin pivot	704
(D) Cradle base	1600
(E) Rear overhang	1094
(F) Height to top of roof	2225
(H) Seat height	1205
(J) Total working height	3235
(K) Max. lifting height	2600
(L) Loading height	2300
(M) Ejection height	2250
(N) Range (m)	517
(O) Digging depth	65
(P) Overall width	1340
(Q) Track width	980
(S) Ground clearance	230
(T) Outer diameter	2597
(U) Turning circle	3085
(V) Inside turning circle	1419
(W) Rotation angle	45
(X) Tilting angle at max. lifting height	45
(Y) Tipping angle	45
(Z) Tilt-in angle	46

Pictures


















Eurotrac








Please peel off the protective film before using




Eurotrac
W12S