HeusTractors
Stougjesdijk 153 3271 KB
Mijnsheerenland NL
info@heustractors.com
+31 (0) 186 61 2333



EUROTRAC W12 CS

The Eurotrac W12-CS for agricultural and industrial use

Fitted as standard with:

- Kubota Stage V engine
- Additional hydraulic function on joystick
- Hydraulic quick-change coupler
- Hydrostatic transmission with 2 travel speeds
- Suspension seat
- Heavy-duty axles
- Reversing camera
- Wide tyres 31×15.5-15

€28,650.00

Specifications

ELECTRICAL INFORMATION

Electric system	12 V

ENGINE

Cooling	Water, Liquid
Engine power	26

HYDRAULIC SYSTEM


Oil yield	46
Workload	180 bar


OTHER

Diesel tank	45
Hydro tank	40

WEIGHT	
Lifting frame horizontal & machine straight	1200
Lifting frame horizontal & machine tilted	839 kg
Max. Lifting capacity	1350
Own weight	2280

Technical drawing

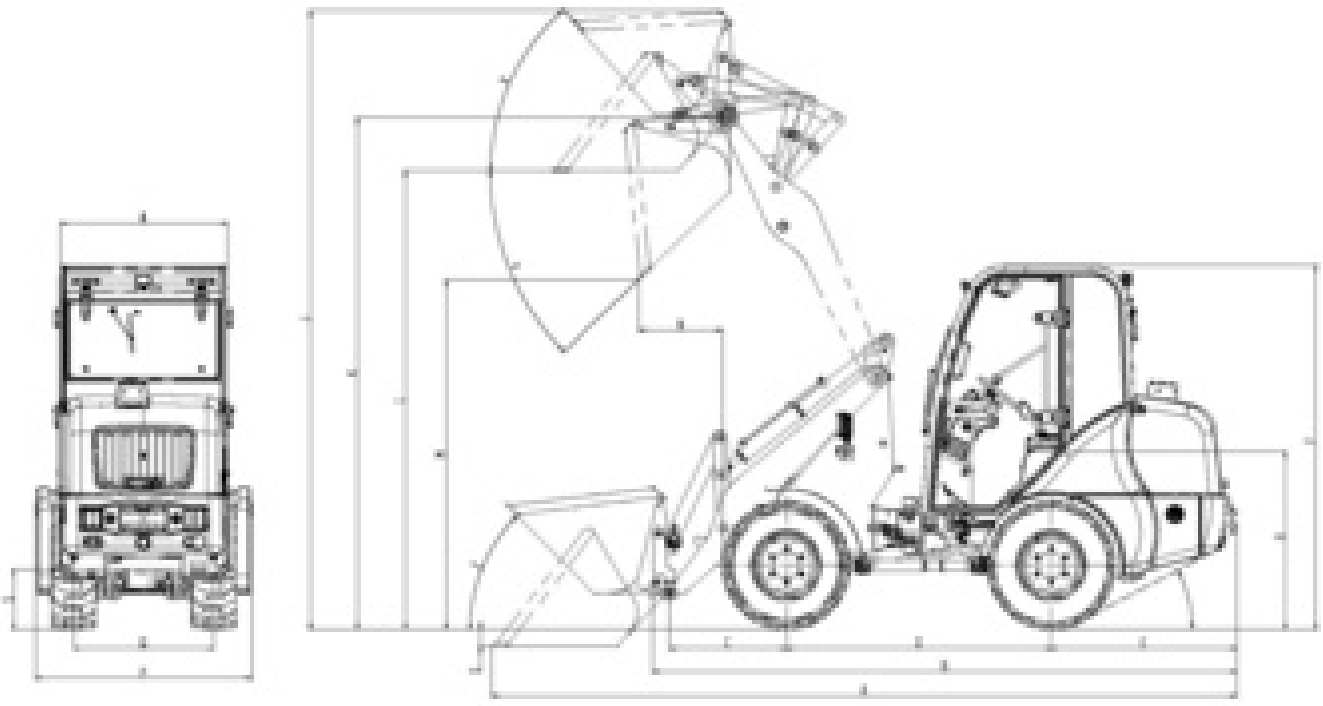

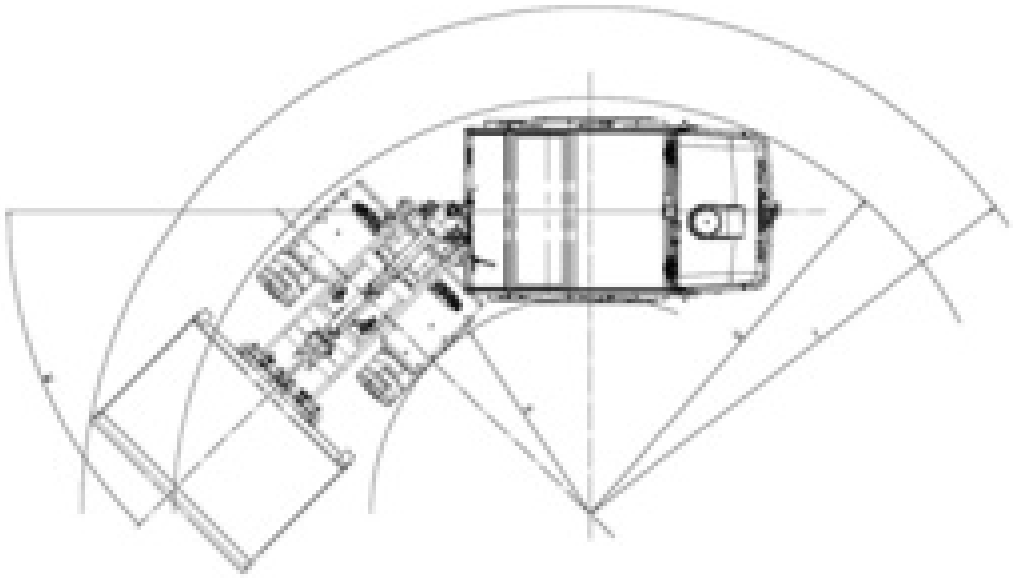

(A) Overall length with bin	4360
(B) Overall length without bin	3440
(C) Bin pivot	704
(D) Cradle base	1600
(E) Rear overhang	1094
(F) Height to top of roof	2225
(H) Seat height	1205
(J) Total working height	3728
(K) Max. lifting height	2900
(L) Loading height	2810
(M) Ejection height	2250
(N) Range (m)	517
(O) Digging depth	65
(P) Overall width	1340
(Q) Track width	980
(S) Ground clearance	230
(T) Outer diameter	2597
(U) Turning circle	3085
(V) Inside turning circle	1419
(W) Rotation angle	45
(X) Tilting angle at max. lifting height	45
(Y) Tipping angle	45
(Z) Tilt-in angle	46

Pictures


















Eurotrac
W12S
















Please peel off the protective film before using


AUX
PUSH
SEL/MENU






Eurotrac

