



## HeusTractors

Stougjesdijk 153 3271 KB

Mijnsheerenland NL

[info@heustractors.com](mailto:info@heustractors.com)

+31 (0) 186 61 2333

## EUROTRAC W12 ICS

The Eurotrac W12-ICS for agricultural and industrial use

Fitted as standard with:



- Kubota StageV engine
- Extra hydraulic function on joystick
- Hydraulic quick coupler
- Hydrostatic with 2 travel speeds
- Radio / Fan / Camera
- Heavy duty axles
- Light bar / LED lights
- Wide tyres 31x15.5-15

**€29,300.00**

## Specifications

### ELECTRICAL INFORMATION

|                  |      |
|------------------|------|
| Battery capacity | 60   |
| Electric system  | 12 V |

### ENGINE

|              |        |
|--------------|--------|
| Cooling      | Liquid |
| Engine power | 26     |

### HYDRAULIC SYSTEM

|           |         |
|-----------|---------|
| Oil yield | 46      |
| Workload  | 180 bar |



### OTHER

|             |    |
|-------------|----|
| Diesel tank | 45 |
| Hydro tank  | 40 |

## **WEIGHT**

|                                             |        |
|---------------------------------------------|--------|
| Lifting frame horizontal & machine straight | 1350   |
| Lifting frame horizontal & machine tilted   | 840 kg |
| Max. Lifting capacity                       | 1350   |
| Own weight                                  | 2280   |

## **Technical drawing**

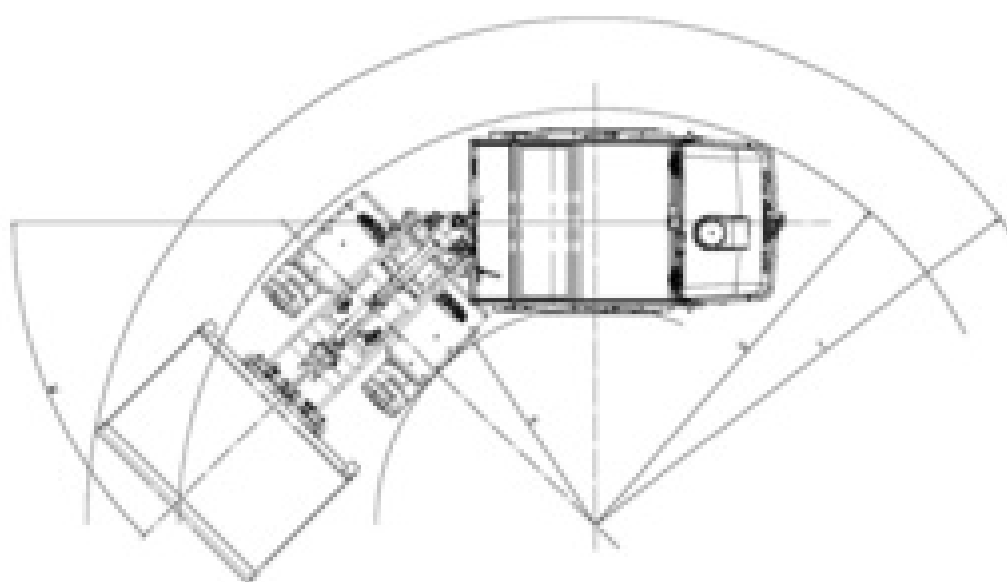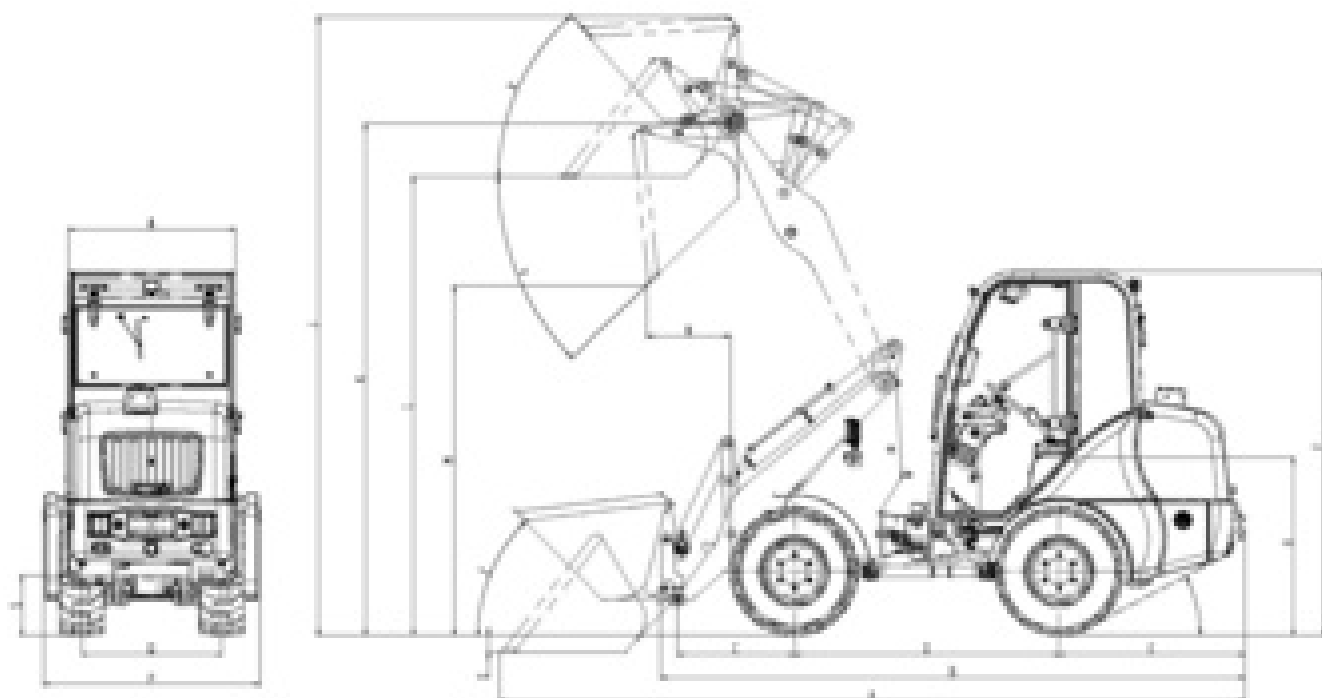

|                                          |      |
|------------------------------------------|------|
| (A) Overall length with bin              | 4360 |
| (B) Overall length without bin           | 3235 |
| (C) Bin pivot                            | 704  |
| (D) Cradle base                          | 1600 |
| (E) Rear overhang                        | 1094 |
| (F) Height to top of roof                | 2225 |
| (H) Seat height                          | 1205 |
| (J) Total working height                 | 2742 |
| (K) Max. lifting height                  | 2200 |
| (L) Loading height                       | 1790 |
| (M) Ejection height                      | 2250 |
| (N) Range (m)                            | 517  |
| (O) Digging depth                        | 65   |
| (P) Overall width                        | 1340 |
| (Q) Track width                          | 980  |
| (S) Ground clearance                     | 230  |
| (T) Outer diameter                       | 2597 |
| (U) Turning circle                       | 3085 |
| (V) Inside turning circle                | 1419 |
| (W) Rotation angle                       | 45   |
| (X) Tilting angle at max. lifting height | 45   |
| (Y) Tipping angle                        | 45   |
| (Z) Tilt-in angle                        | 46   |

## Pictures





