HeusTractors
Stougjesdijk 153 3271 KB
Mijnsheerenland NL
info@heustractors.com
+31 (0) 186 61 2333



EUROTRAC W10

With its compact construction, the Eurotrac W10 wheel loader is good to use in small spaces and when fattening stables.

Standard features include:

- 3 cylinder Kubota engine,
- Hydrostatic drive
- Joystick controls with extra function
- Hydraulic quick coupler
- Extra hydraulic connection
- Work light / beacon

€17,800.00

Specifications

ELECTRICAL INFORMATION

Electric system	12 V

ENGINE

Cooling	Liquid
Engine power	22

HYDRAULIC SYSTEM

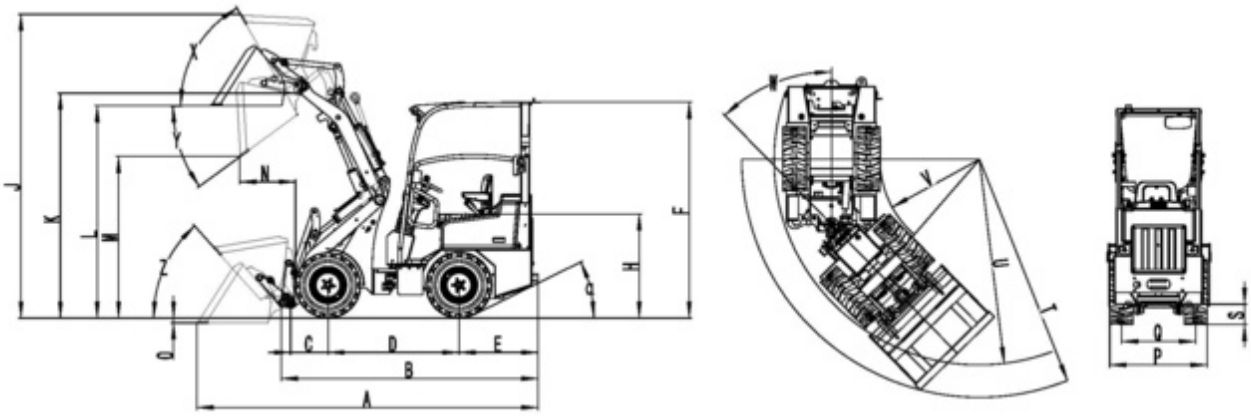
Oil yield	25
Workload	180 bar

OTHER

Diesel tank	25
Hydro tank	32

WEIGHT	
Lifting frame horizontal & machine straight	700
Lifting frame horizontal & machine tilted	480 kg
Max. Lifting capacity	850
Own weight	1060

Technical drawing



(A) Overall length with bin	2894
(B) Overall length without bin	2398
(C) Bin pivot	343
(D) Cradle base	1200
(E) Rear overhang	720
(F) Height to top of roof	1930
(H) Seat height	952
(J) Total working height	2585
(K) Max. lifting height	2040
(L) Loading height	1943
(M) Ejection height	1600
(N) Range (m)	376
(O) Digging depth	58
(P) Overall width	890
(Q) Track width	700
(S) Ground clearance	180
(T) Outer diameter	1879
(U) Turning circle	2176
(V) Inside turning circle	911
(W) Rotation angle	43
(X) Tilting angle at max. lifting height	60
(Y) Tipping angle	42
(Z) Tilt-in angle	48

Pictures





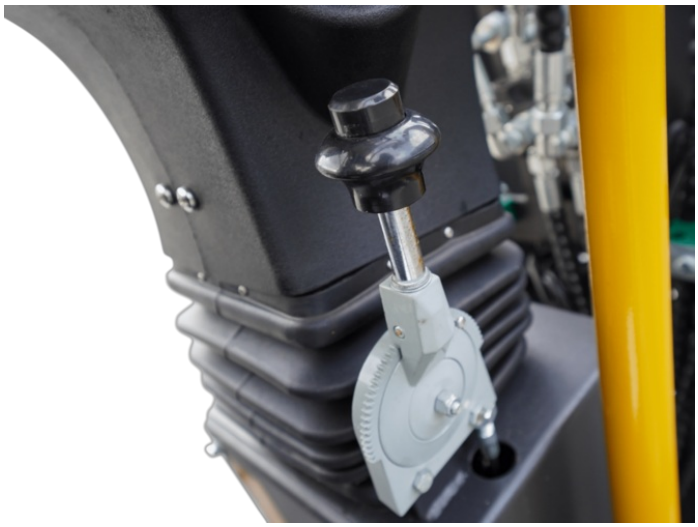

W10
Eurotrac


W10
Eurotrac


W10
Eurotrac


W10
Eurotrac














Eurotrac









